




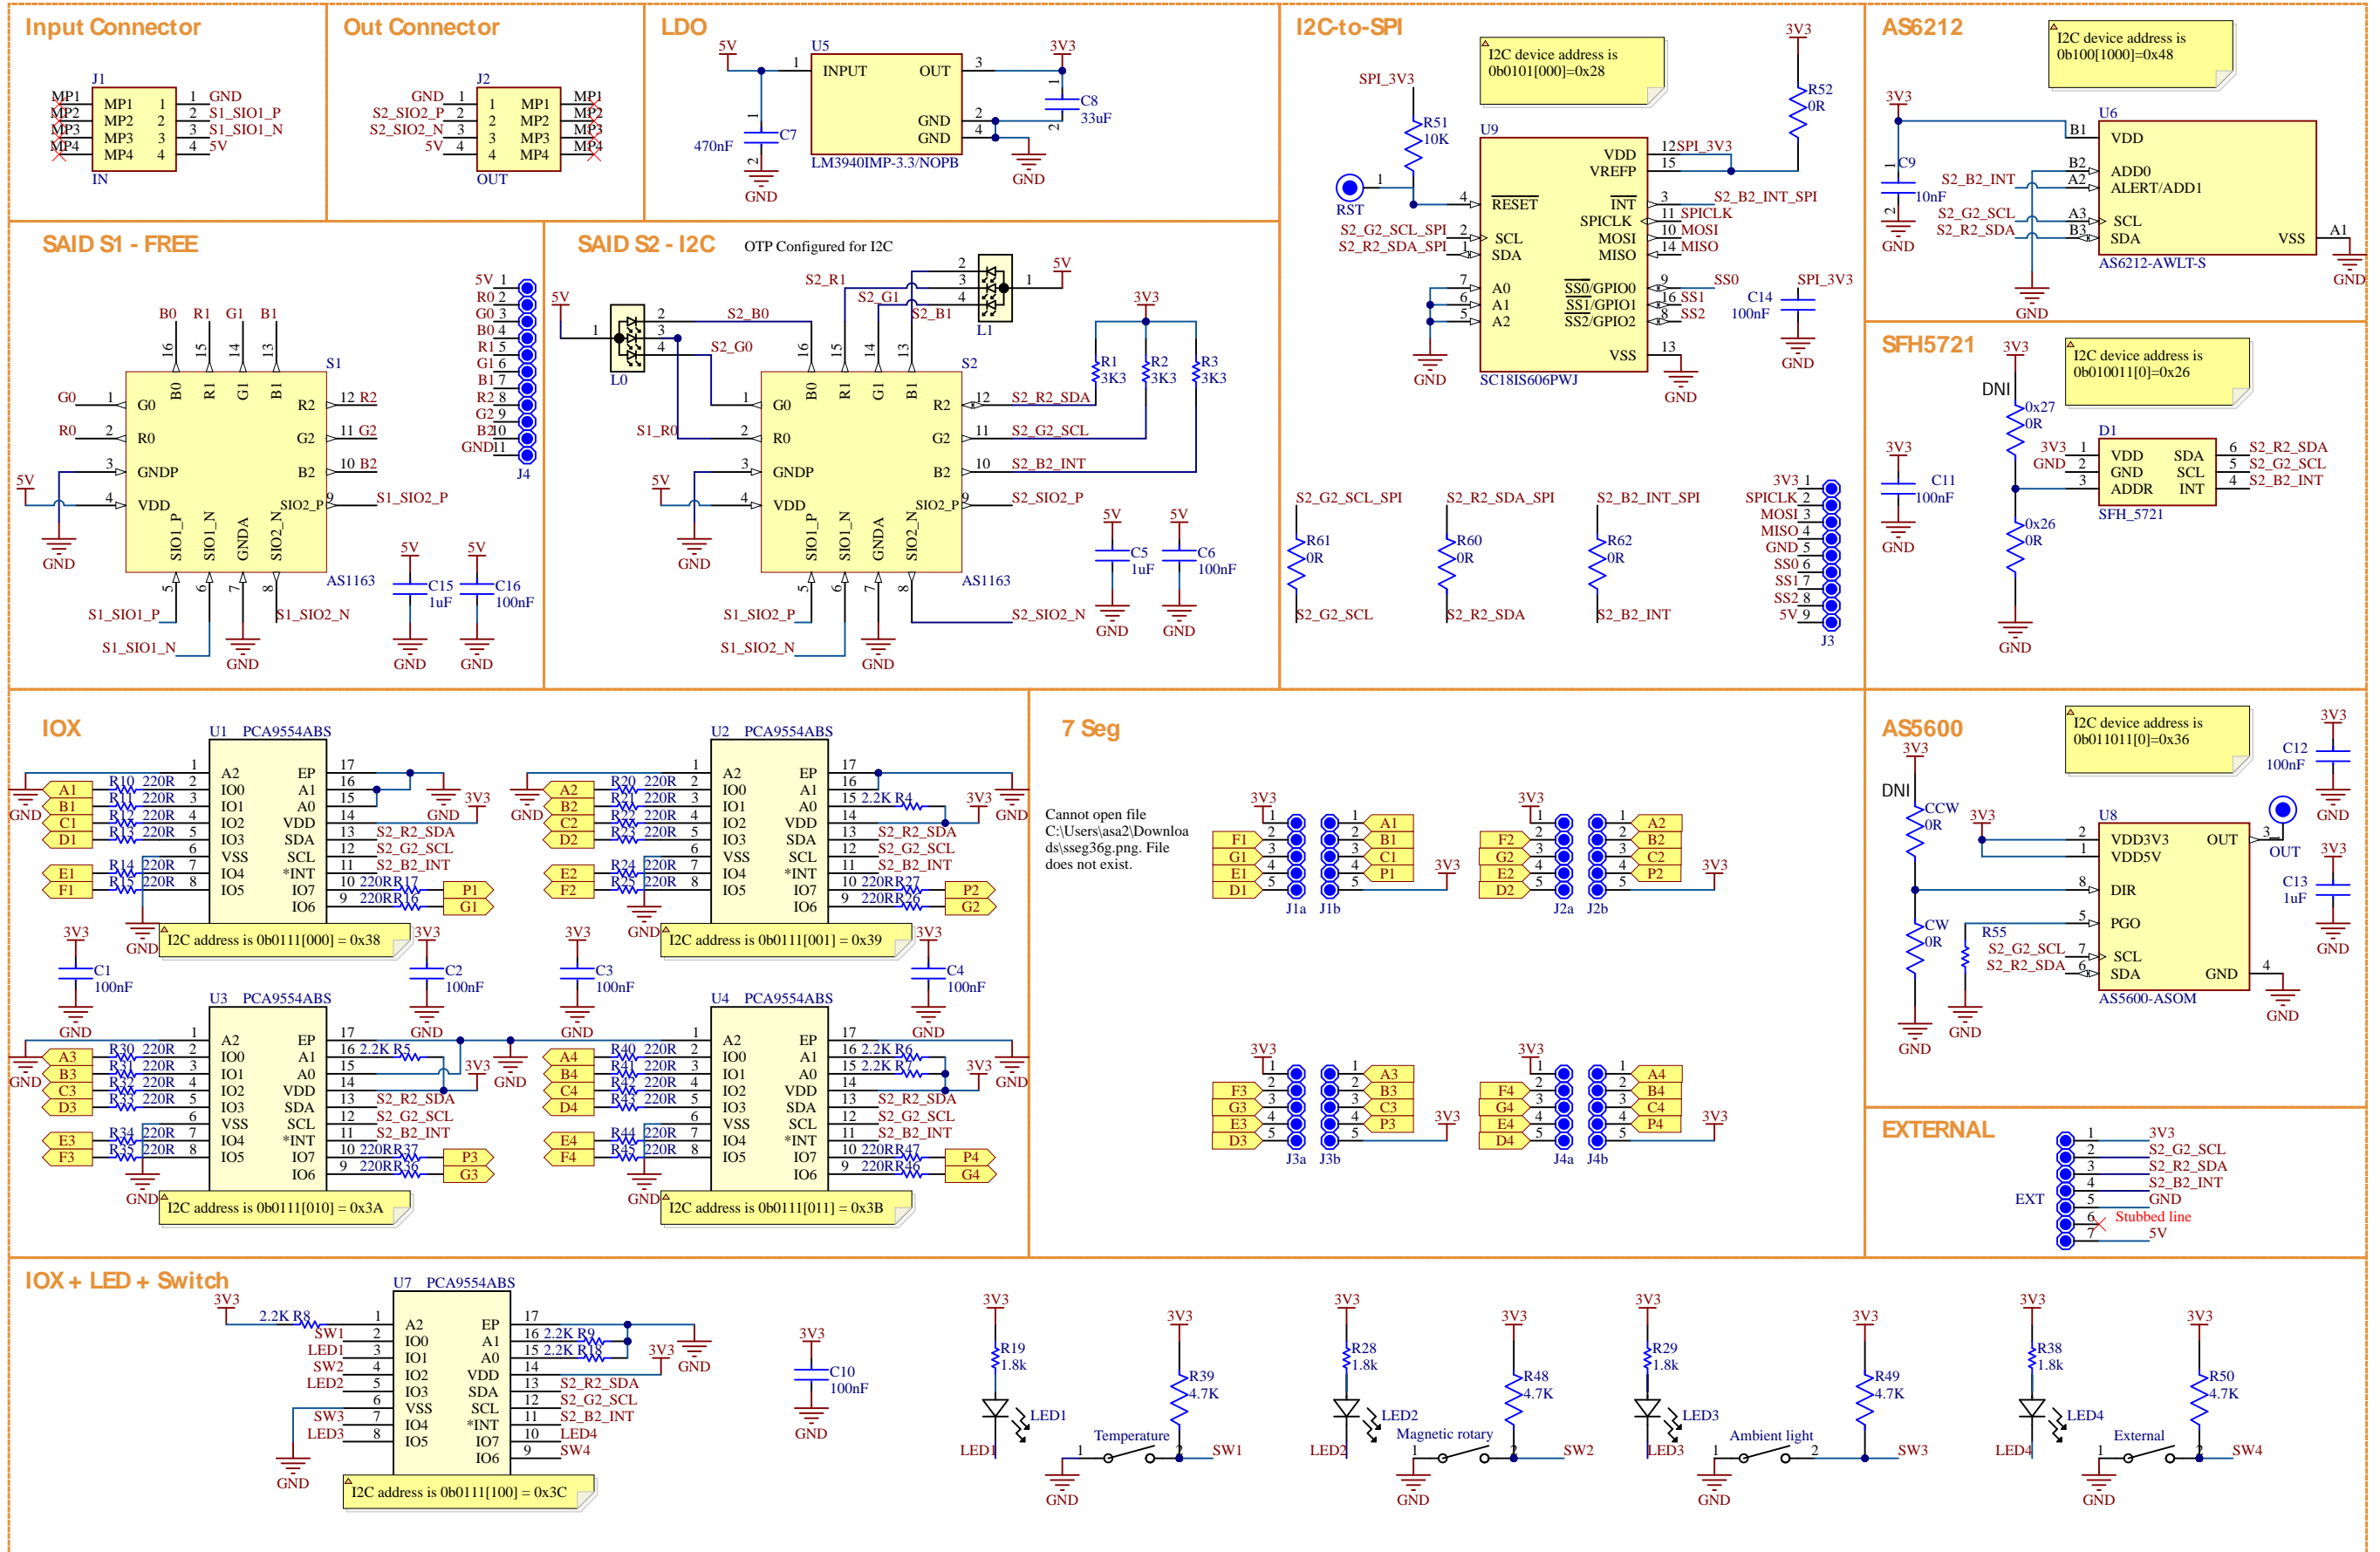

SAIDSense.PrjPcb





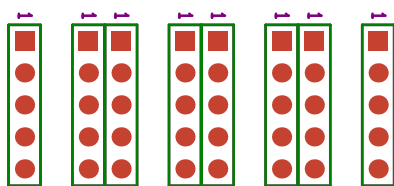


amU OSRAM


SAIDSense v6

Open System Protocol (OSP)

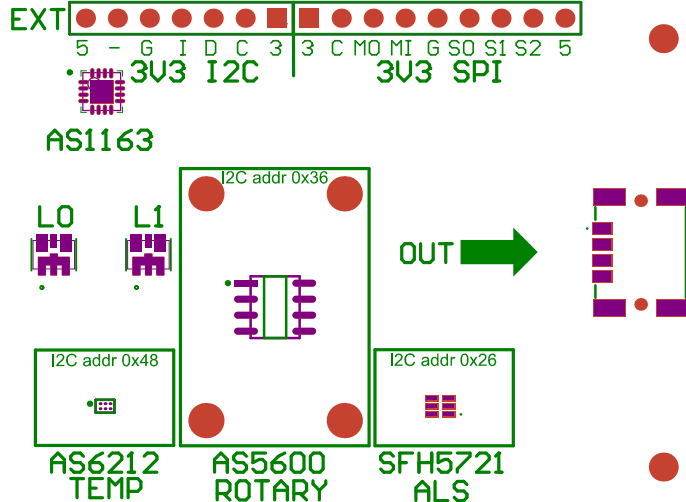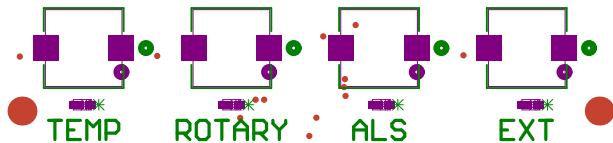



I2C-to-SPI
RESET



IOX4
I2C address 0x3B

IOX3
I2C address 0x3A

IOX2
I2C address 0x39

IOX1
I2C address 0x38



